

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

(43) International Publication Date
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number
WO 02/19528 A2(51) International Patent Classification⁷: H03L 7/091, 7/081, H04L 7/033

(21) International Application Number: PCT/US01/27055

(22) International Filing Date: 30 August 2001 (30.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/229,369 30 August 2000 (30.08.2000) US
09/943,029 29 August 2001 (29.08.2001) US

(71) Applicant: SILICON IMAGE, INC. [US/US]; 1060 East Arques Avenue, Sunnyvale, CA 94086 (US).

(72) Inventors: LEE, Sang-Hyun; 1226-502 Mokdong Apt., 326 Shinjeong-7-dong, Yangcheon-Gu, Seoul (KR).
JEONG, Deog-Kyoon; 1-1002 Samick Apt., Bangbae-3-Dong, Seocho-Ku, Seoul 137-754 (KR).

(74) Agent: SMITH, Jeffrey, S.; Penwick & West LLP, Two Palo Alto Square, Palo Alto, CA 94306 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DATA RECOVERY USING DATA EYE TRACKING

(57) Abstract: A data recovery system for a serial digital data link includes a data sampler, compare logic, a phase controller, and a phase shifter. The data sampler samples input data three times in a bit time which time is determined by clock pulses generated by the phase shifter, and recovers digital data according to a predetermined decision criterion. Data sampling phases are split so as to track the data eye. The compare logic compares the output of the data sampler according to a predetermined method. Phase controller uses the output of the compare logic and generates phase control signals. These signals are set so as to control the sampling times of the data sampler and to attain near optimally recovered data stream. The phase shifter uses the phase control signals and makes three different phase clocks from input clock. The input clock can be an external clock, or can be recovered from the external clock or input data stream.

DATA RECOVERY USING DATA EYE TRACKING

RELATED APPLICATIONS

5 [0001] This application claims priority under 35 U.S.C. § 119(e) to U.S. Application Serial No. 60/229,369 of Lee and Jeong, entitled "Data Recovery Using Data Eye Tracking" filed August 30, 2000, which is incorporated by reference herein in its entirety.

BACKGROUND OF THE INVENTION

Technical Field

10 [0002] This invention relates generally to data communications, and more specifically to data recovery for serial digital data link.

Description of the Related Art

 [0003] A number of digital data recovery systems are based on a sampling
15 recovery method that uses sampled data to control the data sampling time. For example, Rau discloses a method for serial non-return-to-zero (NRZ) data transmission. See Rau et al., "Clock/Data Recovery PLL Using Half-Frequency Clock," IEEE Journal of Solid-State Circuits, pp.1156-1160, No.7, July 1997. Rau includes a general feature of phase-locked loops (PLLs) that includes a phase detector, a loop filter, and a voltage- controlled oscillator
20 (VCO). The structures and operations of the loop filter and the VCO are the same as generally known to those skilled in the field. But, an unusual feature of the design is the phase detector, which uses a delay-locked loop (DLL) to generate multiple sampling clocks. The VCO can run at a clock rate lower than the data rate, specifically at half the data rate.

 [0004] The PLL adjusts the clock to an incoming data stream. Because of the
25 random nature of data, data transition does not necessarily occur at every clock cycle. The loop must handle a sequence of consecutive zeros or ones in the data stream. In general, for

good loop performance, the control signal should be proportional to the phase error. However, at very high operating frequencies, analog signals depend on the data pattern and become highly nonlinear because they do not settle during the bit duration. On the other hand, clock recovery schemes based on sampling techniques result in uniform digital control
5 pulses.

[0005] The data stream is sampled twice within a bit time (the time between received bits). The first of the sampled data are the recovered data, forming the output stream at the original data rate. The second sampled data, which are sampled at half of the bit time later than the first, are used for phase decision. If data transition occurs, and the second
10 sampled data equal the first, it indicates that the sampling phase is early. The frequency of the VCO is then lowered and the sampling phase is delayed. On the contrary, if data transition occurs, and the second sampled data are not equal to the first, it indicates that the sampling phase is late. The frequency of the VCO is then raised and the sampling phase is advanced. If there is no data transition, the phase detector operates so that there is no control
15 on the sampling phase. The stable operating point of the sampling loop is reached when the second sampling is done exactly at the data transition. This so-called bang-bang operation can make the clock jitter smaller than the one introduced by data dependent and nonlinear analog pulses at high frequencies.

[0006] Poulton discloses a similar data recovery scheme. See Poulton et al., "A
20 Tracking Clock Recovery Receiver for 4Gbps Signaling," *IEEE Micro*, pp.25-26, Jan-Feb 1998. The system is aimed at a higher data rate and uses a demultiplexing receiver to recover high frequency data with a lower frequency clock. The clock rate is one tenth of the data rate. Therefore, the receiver produces 20 samples of the incoming bit stream. Half of the samples are used to output the recovered data stream, while the remaining half are used for phase
25 control as in Rau. Up and Down signals are generated for each of the 10 sample pairs, and the results are summed by an analog summer to generate a differential analog phase control

voltage pair. This operation is performed using a switched capacitor filter summer. In this system, the sampling phase is generated by a phase shifter and a delay-locked loop (DLL). The Up/Down signals control the bias voltage of the phase interpolator in the phase shifter and make the phase of the phase shifter output either advanced or delayed. The 20 phase clocks are generated as the outputs of the consecutive delay stage in the DLL.

[0007] The above-described systems are tracking receivers. They control sampling instants by using twice oversampled data. They find the transition edge of an input data stream using the bang-bang operation, and sample the valid data at the position that is half of the bit time distance from the transition edge. If the received data stream has no jitter and is not distorted by the channel, the sampling phase is not critical to the receiver performance. If the received data stream has a small jitter but is not distorted by the channel, the sampling phase may be deviated from the center of the data eye without any performance degradation. But if the received data stream has a jitter comparable to a bit time or is heavily distorted by the channel, the sampling phase deviation from the eye center has a great impact on the performance such as a bit-error-rate (BER). Furthermore, if the jitter is not distributed symmetrically around the transition center, the eye center cannot be correctly tracked by the above two methods.

SUMMARY OF THE INVENTION

[0008] A described embodiment of the present invention provides a data recovery apparatus that can give accurate phase tracking for a serial digital data link.

[0009] A described embodiment of the present invention provides a data recovery apparatus that is based on indirect statistical bit-error-rate measurements.

[0010] A described embodiment of the present invention provides a data recovery apparatus where the sampling phase tracks the practical data eye rather than the data transition center.

[0011] The foregoing are accomplished by the present invention providing data recovery that can be used for a serial digital data link. It is particularly suitable for a very high speed data link that suffers from jitter and signal shape distortion. The system is devised so that better data recovery is possible under the above conditions. The key idea is to make the timing loop track the center of data transition, instead of the practical eye-opening. The center of the data eye may not be matched to the half bit time distance from the transition center as discussed above. In this case, this invention could achieve much lower bit-error-rate than prior tracking receivers.

[0012] The eye opening is tracked by an indirect statistical method by measuring a pseudo bit-error-rate. Practically, there is no way for the receiver to measure a bit-error-rate directly because the receiver does not have information about the transmitted data stream while it samples it. Here, basically three-times oversampling in a bit time is used based on the assumption that the output stream made of center sampled data is the same as the transmitted data stream. The advanced and delayed sampling is used to compare the sampled data to the center sampled data. By summing and/or averaging the compared results over some bit time, a pseudo bit-error-rate is achieved. If one data bit is sampled in one clock cycle, the summing can be done by a charge pump or other types of integrating devices. Practically, this is a method used in a PLL including a charge pump. Or if multiple data bits are sampled in a clock cycle, the summing can be done by simply summing the comparison results in a clock cycle. The summing device can be implemented as a digital device or analog device. An example of this summing method is described in Poulton.

[0013] The assumption that the output stream made of center sampled data is the same as the transmitted data stream may seem unreasonable. But, under a steady locked state, if the signal-to-noise ratio (SNR) is high enough, this assumption gives good results on the pseudo bit-error-rate measurement. Under an out-of-lock state, although the pseudo bit-error-

rate measured by this method will not match the real bit-error-rate, the timing loop can make the sampling phase go locked and track the eye opening.

[0014] The tracking ability depends greatly on the loop design. The loop is designed so that the three sampling phases are within the eye opening with some margin. This is accomplished by at least two loop control paths. The phase control signal from one path is used to control the phase width (time duration) from an advanced sampling phase to a delayed sampling phase. The signal is determined by the sum of the pseudo bit-error-rate at the advanced sampling position and that at the delayed sampling position. The phase control signal from the other path is used to control the position of the center sampling phase, which, of course, changes the positions of the advanced and delayed sampling phases. The signal is determined by the difference of the two pseudo bit-error-rates at the advanced and delayed sampling positions.

[0015] A described embodiment of the present invention comprises a data sampler, compare logic, a phase controller, and a phase shifter. The data sampler includes three latches. The latches latch outputs according to the input data when triggering occurs by a clock edge. Compare logic compares the three latched data and gives an output indicating whether the sampling phase is early or late compared to the eye opening. This output corresponds to the measurement of the pseudo bit-error-rates at the advanced and delayed sampling positions. The phase controller includes two loop control sub-blocks. One of the sub-blocks generates a control signal that controls the position of the center sampling phase. It calculates the difference of the two pseudo bit-error-rates and integrates by a loop filter, which can be made of a charge pump. The other sub-block generates a control signal that controls the phase width between the advanced and delayed sampling phases. It adds the two pseudo bit-error-rates and passes through a loop filter. The phase shifter makes the three sampling clocks under control of the two-phase control signals.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 shows the data eye diagram for a serial digital data link;

[0017] FIG. 2 shows the jitter distribution and bit-error-rate with the same time base shown in FIG. 1;

5 [0018] FIG. 3a and 3b are illustrative diagrams showing the three sampling phases of an embodiment of the invention;

[0019] FIG. 4 is a system block diagram illustrative of an embodiment of the invention;

[0020] FIG. 5 is a detailed block diagram of the data sampler and compare logic of
10 FIG. 4.

[0021] FIG. 6 shows a block diagram of a phase controller and phase shifter of FIG. 4.

[0022] FIGS. 7-10 show more detailed block diagrams of embodiments of the phase shifter of FIG. 6.

15

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0023] FIG. 1 shows a typical data eye pattern that is a superposition of multiple data transitions with a horizontal displacement indicative of the jitter that may be observed in an actual data link. The source of the jitter may be: (1) transmitter clock jitter generated by power supply fluctuation or any other noise, (2) inter-symbol interference caused by the
20 mixture of randomly transmitted data pattern and channel attenuation, or (3) a jitter source in a receiving device similar to that of a transmitting device. The first and second terms reflect direct jitter sources that can be measured by a measurement device. The last term is not measurable, but it also affects the receiving performance. In FIG.1, the diamond shape surrounded by 101, 102, 103, 104 and indicated by 'VALID DATA' is the eye opening area.

The vertical length of the eye opening at a certain time position represents the signal strength (energy) at that time. So it is desired to sample the data stream at time position T2, the maximum eye position. If the sampling phase deviates from T2 to T1 or to T3, the bit-error-rate would be increased.

5 [0024] FIG. 2 shows a typical jitter distribution probability 201 for the eye pattern of FIG. 1 with the same horizontal axis, and it also shows the bit-error-rate 202 as a function of the sampling phase. In the figure, the jitter is shown to be distributed symmetrically around the center of data transition. In this case, the eye opening will be halfway between the left and right transition center. But, in some cases, the eye opening may not be symmetric,
10 having a long tail in one direction when the jitter source is heavily biased in one direction. Therefore, the eye opening leads or lags the halfway position. The tracking receivers presented in Rau and Poulton make the sampling phase track the transition center. Those are well suited for a symmetric jitter distribution, but not for a non-symmetric distribution.

 [0025] FIGS. 3a and 3b show three sampling phases of an embodiment of the
15 invention. 'CLK2' 308 is the clock for the center sampling phase of an embodiment of the invention. 'CLK1' 307 and 'CLK3' 309 represent the clocks for advanced and delayed sampling phases, respectively. Assuming that the center-sampled data by 'CLK2' 308 is correct, the bit-error-rate could be measured by comparing the two data sampled by 'CLK1' 307 and by 'CLK3' 309 to the center sampled data. The bit-error rate will be simply 'zero' or
20 'one' if the sampled results are compared for only one bit. The bit-error rate will be some number between 'zero' and 'one' if multiples of sampled results are compared for a predetermined time duration or for a predetermined number of bits given by a demultiplexing receiver such as that shown in Poulton. If the measured bit-error rate is greater than a predetermined value 305 (or a predetermined margin), the corresponding sampling phase
25 would be apart from the eye opening, and be in the jitter region. The term 'predetermined margin' indicates that the phases of 'CLK1' and 'CLK3' do not exactly coincide to the edge of

the data eye. The data eye is related to the probabilistic distribution of jitter. Furthermore, the phase controller has a low pass filter, which makes the phases of 'CLK1' and 'CLK3' determined by the past history of random jitters on the data.

[0026] In the present invention, 'CLK2' 308 is controlled by a phase control signal that is determined from the difference of the bit-error-rate measured at 'CLK1' 307 and the one measured at 'CLK3' 309. 'CLK1' 307 and 'CLK3' 309 are advanced and delayed from 'CLK2' 308 by the time difference of 'TM' 310, respectively. The time difference 'TM' 310 is controlled by another phase control signal that is determined from the summation of the two bit-error-rate. If bit-error-rate at 'CLK1' 307 is greater than the one at 'CLK3' 309, it means that the overall sampling phase leads the eye opening. Therefore, the phase of 'CLK2' 308 is delayed until the two bit-error-rate becomes equal. On the contrary, if the bit-error-rate at 'CLK1' 307 is smaller, the phase of 'CLK2' 308 is advanced. If the sum of the two bit-error-rate exceeds a predetermined value, 'TM' 310 is decreased to shrink the sampling window to the eye opening. If the sum is less than predetermined value, 'TM' 310 is increased.

[0027] The mechanism described above on the dual phase control operates correctly when the data recovery loop is in a steady locked state. Although many other cases of the unlocked state may be considered, the mechanism can make the loop enter the locked state eventually. If it is desired to make the system operate more efficiently and go to lock faster, a certain lock-aiding apparatus could be added.

[0028] FIG. 4 is a system block diagram of an embodiment of the present invention. The overall system includes a data sampler 403, compare logic 407, a phase controller 410, and a phase shifter 413. Input data 401 comes from the channel directly or is the output of any type of filter, pre-amplifier, buffer, etc which modifies the shape of the signal from the channel. The data sampler 403 oversamples and latches the input data 401 by a predetermined decision criterion. Compare logic 407 compares the latched data 404, 405, 406 and measures the pseudo bit-error-rate for the sampled data set. The phase controller 410

decides the phase relationship between the sampling clocks 414, 415, 416 and input data 401, and outputs phase control signals 411, 412 through a loop filter, which is a low pass filter such as charge pump, RC filter, etc. Phase shifter 413 splits and shifts the phase of the input clock 402 to make the desired three phase clocks 414, 415, 416. The input clock 402 could be
5 externally supplied from transmitter or other control device, or could be recovered from the input data stream 401. The frequency of input clock 402 is matched to the input data rate so that the recovery loop does not lose lock owing to the frequency difference.

[0029] FIG. 5 shows a detailed block diagram of the data sampler 403 and the compare logic 407. The data sampler 403 has three latches 502, 503, 504. They latch input
10 data on triggering of the three clock signals 'CLK1' 414, 'CLK2' 415, 'CLK3' 416 respectively. The outputs of the data sampler, 'LD1' 404, 'LD2' 405, 'LD3' 406, are provided to the compare logic 407, while 'LD2' 405 makes an output stream as the recovered data.

[0030] Compare logic 407 compares 'LD1' 404 and 'LD3' 406 with 'LD2' 405 by
15 comparing means, which is implemented as XOR gate 505, 506 in the figure. Because of the different latching time for 'LD1' 404, 'LD2' 405 and 'LD3' 406, it is better to latch the comparison results 507, 508 by another clock 'CLK4' 501 rather than directly output the results. This clock 501 should not overlap the meta-stable time duration during which the comparison results are meaningless. Therefore, 'CLK4' 501 should trigger the latch before
20 'LD1' 404 is latched or after 'LD3' 406 is latched.

[0031] FIG. 6 shows a detailed block diagram of phase controller 410 and a block diagram representing phase shifter 413. Phase controller 410 gets the outputs of compare logic 407, 'PD1' 408 and 'PD2' 409, and estimates the phase relationship between the latching clock 414, 415, 416 and input data 401. The phase of 'CLK2' 415 could be estimated by
25 phase estimator(I) 601, which calculates the difference of 'PD1' 408 and 'PD2' 409. This estimation result 603 is fed to loop filter(I) 605 to generate the low-pass filtered output 'PC1'

411, which determines the phase delay of 'CLK2' 415. The phase difference 'TM' 310 between 'CLK2' 415 and the other two clocks 414, 416 could be estimated by phase estimator(II) 602, which calculates the sum of 'PD1' 408 and 'PD2' 409. This estimation result 604 is fed to loop filter (II) 606 and generates the other low-pass filtered output 'PC2' 412. 'PC2' 412 determines the amount of phase advance and phase delay for 'CLK1' 414 and 'CLK3' 416 respectively. There are many different ways to implement the phase estimators 601, 602. We can determine the weighted difference or sum for faster lock-in time. Some offset may be added to the output 604 of phase estimator (II) 602 to modify the tracking behavior.

10 [0032] The phase shifter 413 comprises a phase delay.

[0033] FIG. 7 shows a first embodiment of phase shifter 413, including a phase delay(I) 707, a phase advance 708, and a phase delay (II) 709. Phase delay(I) 707 is used to adjust the phase of 'CLK2' 415 under control of 'PC1' 411. Phase delay 707 can be made up of a cascade of MOSFET inverters or a resistor-capacitor (RC) delay circuit, where 'PC1' 411 acts as the bias current or bias voltage. Phase advance 708 and phase delay (II) 709 are used to adjust the phase difference of 'CLK1' 414 and 'CLK3' 416 from 'CLK2' 415.

[0034] FIG. 8 shows a second embodiment of the phase shifter 413, which comprises four variable delays 801, 804, 805, 808 and further comprises a phase detector and a loop filter 806. Variable delay(I) 801 is controlled by 'PC1' 411 and adjusts the phase of its output 802. Variable delay(II) 804, variable delay(III) 805, and phase detector and loop filter 806 make up delay-locked loop 803, which makes the phase of 'CLK2' 415 tracks the phase of variable delay(I)'s output 802. Variable delay(III) 805 is controlled by 'PC2' 412 and adjusts the phase difference between 'CLK1' 414 and 'CLK2' 415. Variable delay(IV) 808 is a replica of variable delay(III) 805 and is also controlled by PC2' 412. Therefore, the phase difference between 'CLK2' 415 and 'CLK3' 416 is the same as that between 'CLK1' 414 and 'CLK2' 415.

[0035] FIG. 9 shows a third embodiment of phase shifter 413. It comprises variable delay 901, phase distributor 903, multiplexer(I) 907, multiplexer(II) 909, buffer 908, and selection logic 910. Variable delay 901 has the same function as variable delay(I) 801 in FIG. 8. Phase distributor 903 is a kind of delay-locked loop or phase-locked loop that makes
5 multiples of different phase clocks 904, 905, 906, where the phase of 905 tracks the phase of 902. Here 904 is a bundle of clocks that lead 905 in phase, where the amount of phase leading lies between zero and half bit time. Selection logic 910 controls multiplexer(I) 907 so that it passes one of multiple input clocks 904. Therefore, the phase difference of 'CLK1' 414 and 'CLK2' 415 can be adjusted by 'PC2' 412. Bundle of clocks 906 that lag 905 in
10 phase are input to multiplexer(II) 909, where one of those is selected so that the phase difference between 'CLK2' 415 and 'CLK3' 416 is the same as that between 'CLK1' 414 and 'CLK2' 415. The purpose of buffer 908 is that the propagation delay through itself 908 is the same as that through multiplexers 907, 909 so the phase relationships between 'CLK1' 414, 'CLK2' 415 and 'CLK3' 416 are more accurately controlled.

15 [0036] FIG. 10 shows a fourth embodiment of phase shifter 413. It comprises a voltage-controlled oscillator 1001, variable delay circuits 1003, 1004, 1005, and a dummy buffer 1002. It does not need the input clock 402 because it uses a voltage-controlled oscillator as a clock source. A voltage-controlled oscillator is controlled by 'PC1' 411 and generates a clock whose frequency is adjusted so that the phase of 'CLK2' 415 is located at
20 the optimum sampling position. Variable delay circuits 1003, 1004, 1005 are controlled by 'PC2' 412 and generates 'CLK1' 414, 'CLK2' 415, and 'CLK3' 416, respectively. The dummy buffer 1002 is an optional circuit that could be included so as to match the phase difference between the three clocks 414, 415, 416 equally. For the embodiment of FIG. 10, the phase of 'CLK2' 415 should be controlled by 'PC1' 411 only and should not be affected
25 by the variation of 'PC2' 412. And the phase differences between the three clocks 414, 415, 416 should be affected by 'PC2' 412 and should not be affected by the variation of 'PC1' 411.

If frequency range of the voltage controlled oscillator 1001 is wide, it may be difficult for the phase of 'CLK2' 415 to track the optimum sampling position because of the initial acquisition failure. To avoid this difficulty, we can add a reference loop. See Richard Gu et al, "A 0.5 – 3.5Gb/s Low-Power Low-Jitter Serial Data CMOS Transceiver," ISSCC Digest of Technical
5 Papers, pp.352-353, Feb. 1999. Upon power-up or reset, the data recovery system is defaulted to the reference loop so that the frequency of the voltage controlled oscillator 1001 output is locked to an external reference clock. After initial lock is acquired, the loop containing the signals 'PC1' 411 and 'PC2' 412 is enabled.

[0037] This invention has been described in a considerable detail in order to
10 provide those skilled in the art enough information to apply the principles and to implement the components. The system shown in FIG. 4 through FIG. 6 is applicable to data recovery which samples one bit data per clock. Skilled engineers can modify or expand this embodiment for use in a complex recovery system such as half-frequency receiver of Rau's or the demultiplexing receiver of Poulton's. The present invention can be applied to various
15 types of coding such as NRZ, Manchester, binary PAM, M-ary (multi-level) PAM, etc. The invention can be carried out by different equipment and devices than those described herein, and various modifications, both as to the equipment details and operating procedures, can be accomplished without departing the scope of the invention itself.

[0038] While the invention has been described with reference to preferred
20 embodiments, it is not intended to be limited to those embodiments. It will be appreciated by those of ordinary skilled in the art that many modifications can be made to the structure and form of the described embodiments without departing from the spirit and scope of this invention.

WHAT IS CLAIMED IS:

1. A data recovery apparatus for a digital data stream of input data, comprising:
phase shifting means for outputting multiple sampling clocks in a bit time, where the
phase of said sampling clocks are automatically adjustable;
5 data sampling means for sampling the input data using the sampling clocks as triggers,
and for providing multiple sampled data signals, where one of said sampled
data signals is used to output recovered data;
compare logic means for comparing said sampled data signals to said recovered data;
and
10 phase controlling means for estimating the phase relationship between the input data
and said sampling clocks using the comparison result of said compare logic
means, and for providing control signals to said phase shifting means
according to said estimation result.
2. The apparatus of claim 1 wherein the phase shifting means comprises:
15 phase delay means controlled by a first output of said phase controlling means for
outputting a first sampling clock using an input clock which is one of an
external clock and an internally recovered clock;
first circuit means controlled by a second output of said phase controlling means for
outputting a second sampling clock that advances said first sampling clock in
20 phase;
second circuit means controlled by the second output of said phase controlling means
for outputting a third sampling clock that is delayed from said first sampling
clock in phase; and
the phases of the three sampling clocks are arranged within an eye opening of the input
25 data stream with a predetermined margin.

3. The apparatus of claim 2, wherein the first circuit means and the second circuit means receive the first sampling clock.

5 4. The apparatus of claim 1, wherein the phase shifting means comprises:
a phase distributor outputting a plurality of phase shift values;
a buffer receiving input from the phase distributor and outputting a first sampling clock
in accordance with a first output of said phase controlling means; and
selection logic receiving input from the phase distributor and outputting a second and
10 third sampling clock in accordance with a second output of said phase
controlling means.

5. The apparatus of claim 1 wherein the phase shifting means comprises:
a voltage controlled oscillator controlled by a first output of the phase controlling
means,

15 circuit means controlled by a second output of said phase controlling means for
outputting three sampling clocks by delaying the output of the voltage
controlled oscillator, where the phases of the three sampling clocks are
arranged within an eye opening of input data stream with a predetermined
margin.

20 6. A data recovery apparatus for a digital data stream of input data, comprising:
a phase shifter that outputs multiple sampling clocks in a bit time, where the phase of
said sampling clocks are automatically adjustable;
a data sampler that samples the input data using the sampling clocks as triggers, and
for providing multiple sampled data signals, where one of said sampled data
25 signals is used to output recovered data;

compare logic that compares said sampled data signals to said recovered data; and
a phase controller that estimating the phase relationship between the input data and
said sampling clocks using the comparison result of said compare logic
means, and for providing control signals to said phase shifting means
5 according to said estimation result.

7. The apparatus of claim 6 wherein the phase shifter comprises:

phase delay logic controlled by a first output of said phase controller for outputting a
first sampling clock using an input clock which is one of an external clock
and an internally recovered clock;

10 a first circuit, controlled by a second output of said phase controller, for outputting a
second sampling clock that advances said first sampling clock in phase;

a second circuit, controlled by the second output of said phase controller, for outputting
a third sampling clock that is delayed from said first sampling clock in phase;
and

15 the phases of the three sampling clocks are arranged within an eye opening of the input
data stream with a predetermined margin.

8. The apparatus of claim 6 wherein the phase shifter comprises:

a voltage controlled oscillator controlled by a first output of the phase controller,

20 a circuit, controlled by a second output of said phase control, for outputting three
sampling clocks by delaying the output of the voltage controlled oscillator,
where the phases of the three sampling clocks are arranged within an eye
opening of input data stream with a predetermined margin.

9. A data recovery method for a digital data stream, comprising:

sampling input data at multiple points, where said sampling points are arranged by a predetermined order and adjustable time difference;

providing a first pseudo bit-error signal that is a result of comparison of data sampled at an early boundary with recovered data;

5 providing a second pseudo bit-error signal that is a result of comparison of data sampled at a late boundary with recovered data; and

using the first and second pseudo bit-error signals, so that the sampling boundary is marginally matched to the edge of an eye opening and one of the intermediate sampling points serves for data recovery.

10

1/6

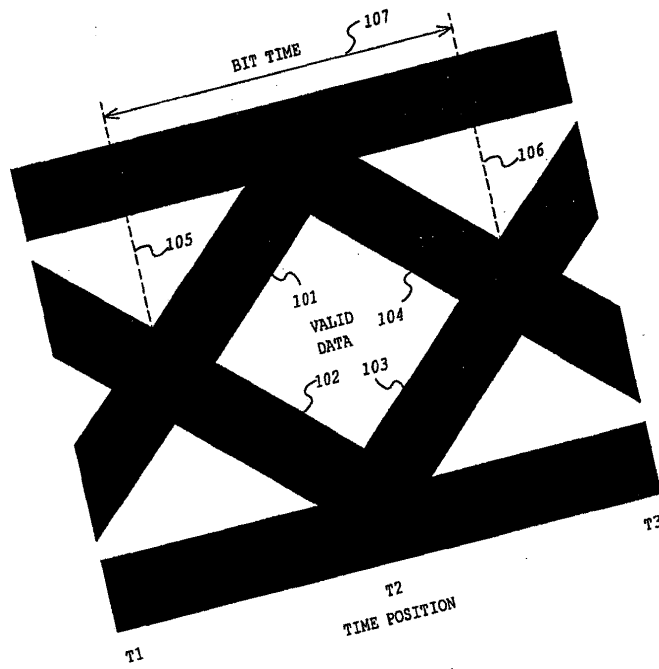


FIG. 1

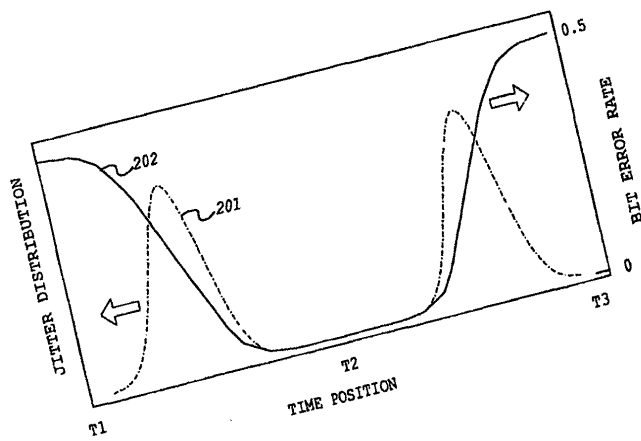


FIG. 2

2/6

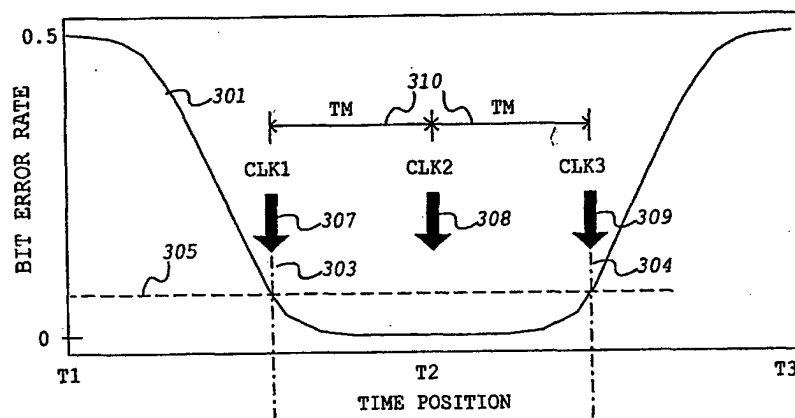


FIG. 3a

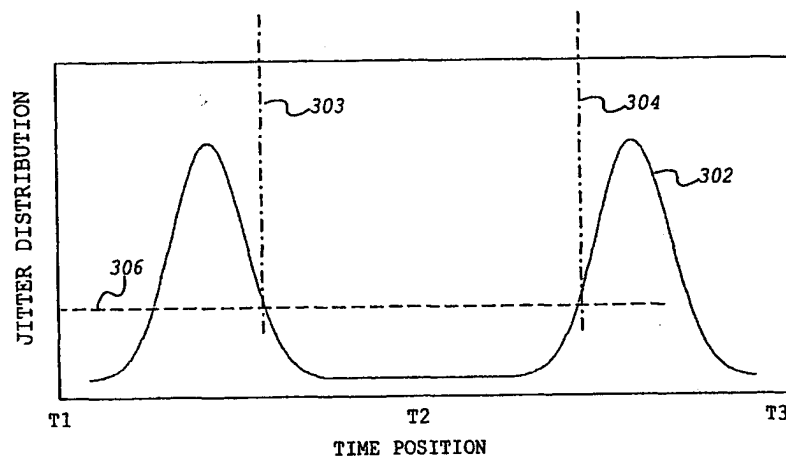


FIG. 3b

3/6

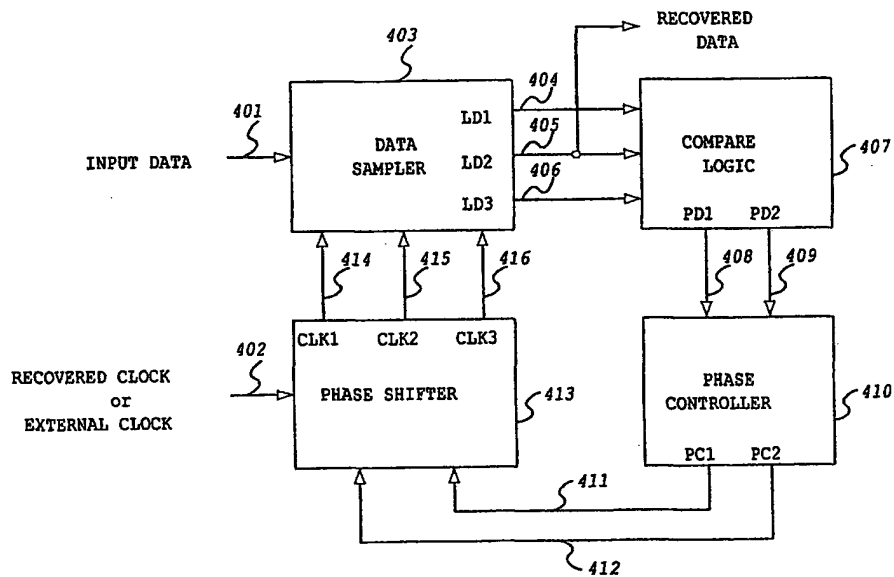


FIG. 4

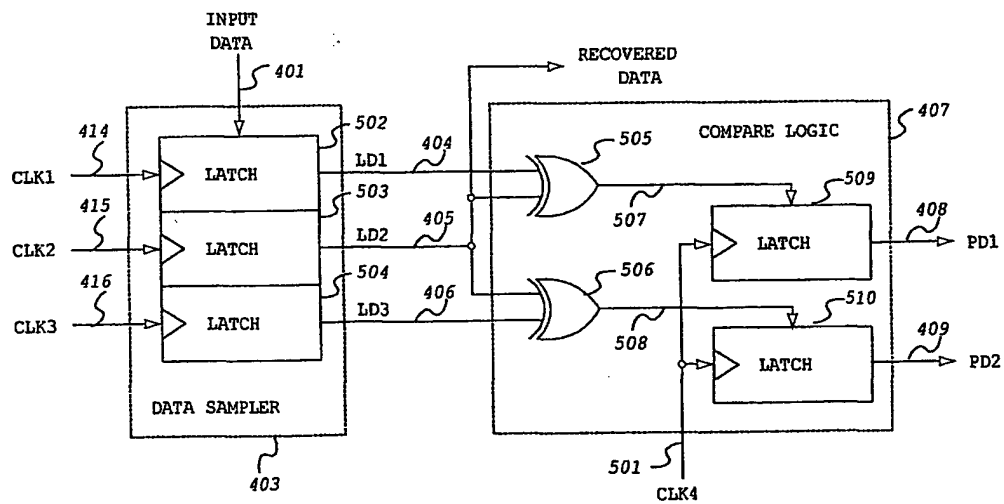


FIG. 5

4/6

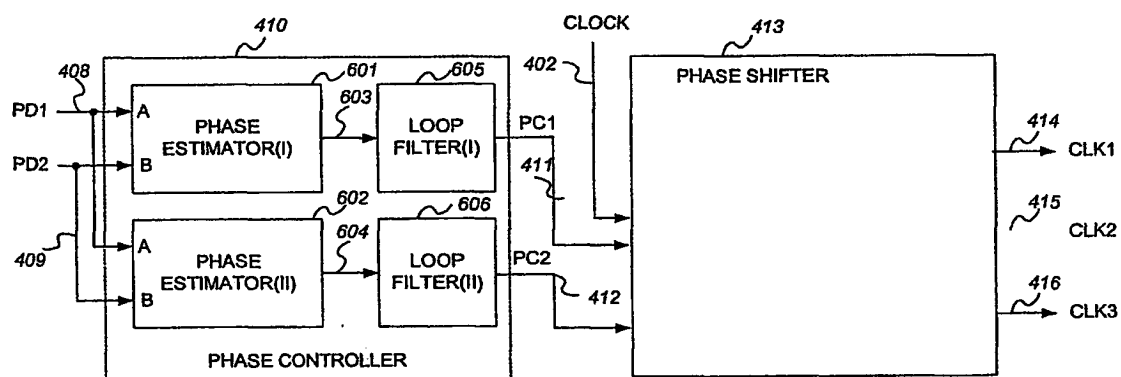


FIG. 6

5/6

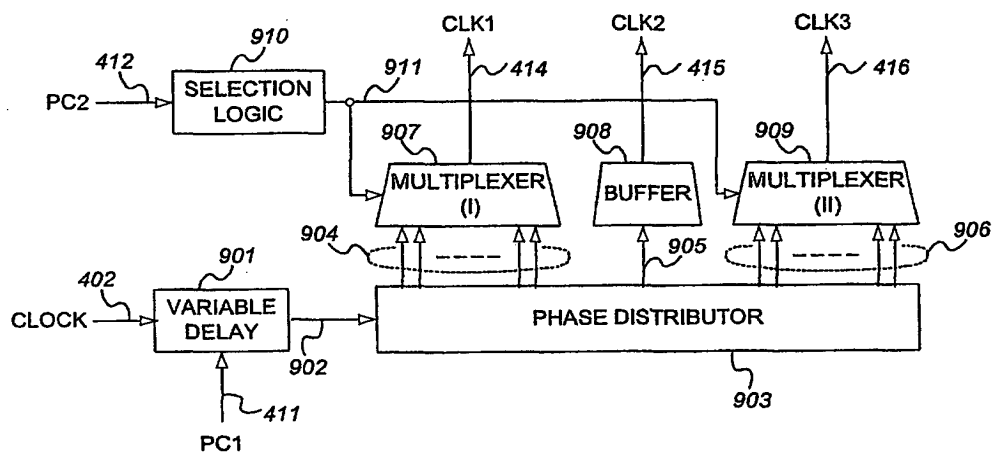


FIG. 9

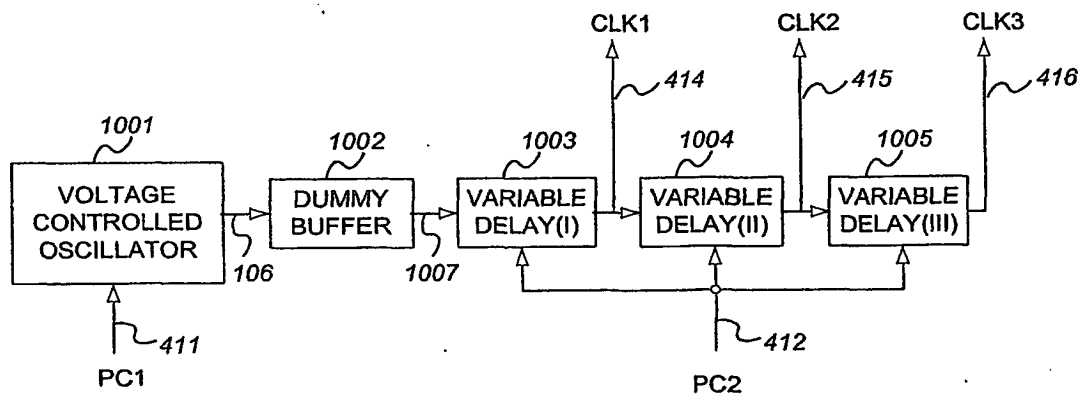


FIG. 10

6/6

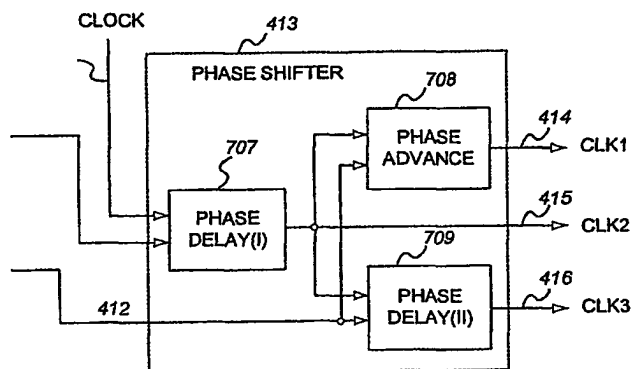


FIG. 7

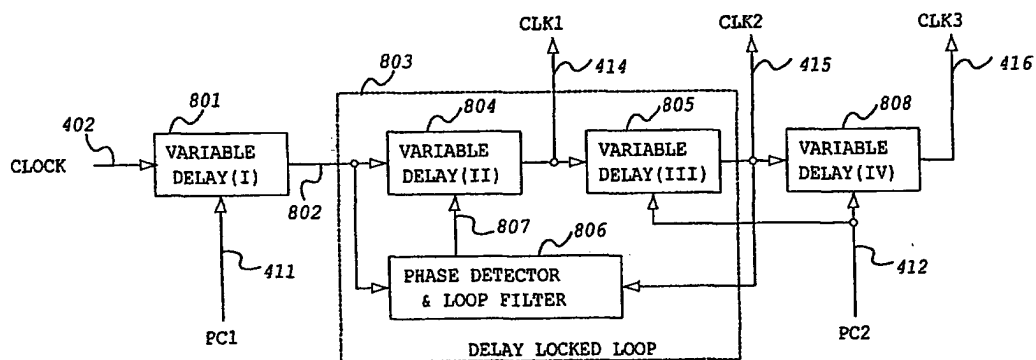


FIG. 8

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



INTERNATIONAL PATENT COOPERATION TREATY (PCT)

(43) International Publication Date
7 March 2002 (07.03.2002)


PCT

(10) International Publication Number
WO 02/019528 A3

- (51) International Patent Classification⁷: H03L 7/091, 7/081, H04L 7/033
- (21) International Application Number: PCT/US01/27055
- (22) International Filing Date: 30 August 2001 (30.08.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/229,369 30 August 2000 (30.08.2000) US
09/943,029 29 August 2001 (29.08.2001) US
- (71) Applicant: SILICON IMAGE, INC. [US/US]; 1060 East Arques Avenue, Sunnyvale, CA 94086 (US).
- (72) Inventors: LEE, Sang-Hyun; 1226-502 Mokdong Apt., 326 Shinjeong-7-dong, Yangcheon-Gu, Seoul (KR). JEONG, Deog-Kyoon; 1-1002 Samick Apt., Bangbae-3-Dong, Seocho-Ku, Seoul 137-754 (KR).
- (74) Agent: SMITH, Jeffrey, S.; Fenwick & West LLP, Two Palo Alto Square, Palo Alto, CA 94306 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: DATA RECOVERY USING DATA EYE TRACKING

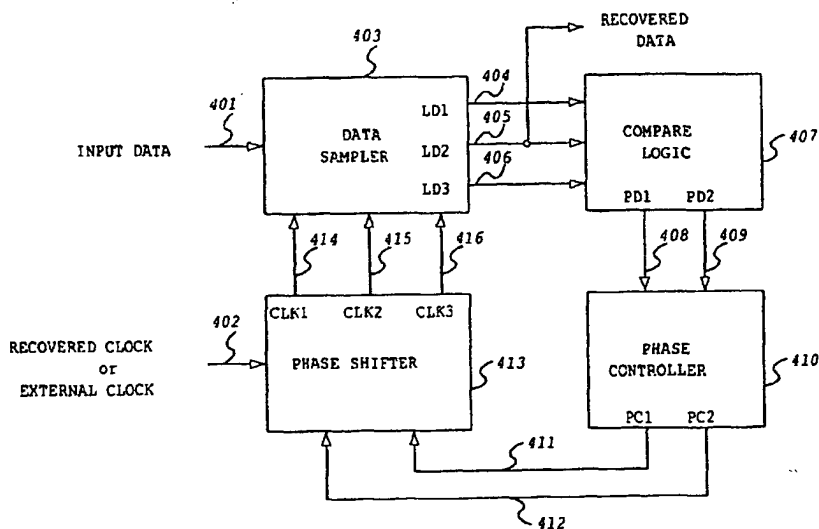

(57) Abstract: A data recovery system for a serial digital data link includes a data sampler (403), compare logic (407), a phase controller (410), and a phase shifter (413). The data sampler samples input data three times in a bit time which time is determined by clock pulses generated by the phase shifter, and recovers digital data according to a predetermined decision criterion. Data sampling phases are split so as to track the data eye. The compare logic (407) compares the output of the data sampler (403) according to a predetermined method. Phase controller (410) uses the output of the compare logic and generates phase control signals. These signals are set so as to control the sampling times of the data sampler and to attain near optimally recovered data stream. The phase shifter uses the phase control signals and makes three different phase clocks from input clock. The input clock can be an external clock, or can be recovered from the external clock or input data stream.



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
19 September 2002

INTERNATIONAL SEARCH REPORT

Internal Application No
PCT/US 01/27055

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H03L7/091 H03L7/081 H04L7/033

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03L H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 317 159 A (AMERICAN TELEPHONE & TELEGRAPH) 24 May 1989 (1989-05-24) page 3, line 26 - line 37; figure 2 page 5, line 13 - line 31 page 5, line 32 - line 55; figure 5	1,6,9
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 11, 26 December 1995 (1995-12-26) -& JP 07 221800 A (NEC CORP), 18 August 1995 (1995-08-18) abstract	1,6,9



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

8 July 2002

Date of mailing of the international search report

15/07/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Aouichi, M

INTERNATIONAL SEARCH REPORT

Internat

Application No

PCT/US 01/27055

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 576 (E-1016), 21 December 1990 (1990-12-21) -& JP 02 250535 A (NIPPON TELEGR & TELEPH CORP), 8 October 1990 (1990-10-08) abstract	1,6,9

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internal Application No

PCT/US 01/27055

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0317159	A	24-05-1989	US 4821297 A	11-04-1989
			CA 1288839 A1	10-09-1991
			DE 3888927 D1	11-05-1994
			DE 3888927 T2	20-10-1994
			EP 0317159 A2	24-05-1989
			ES 2050710 T3	01-06-1994
			JP 1161936 A	26-06-1989
			KR 9107714 B1	30-09-1991
JP 07221800	A	18-08-1995	NONE	
JP 02250535	A	08-10-1990	NONE	